



BlackBerry Z30 Display Assembly Replacement

Use this guide to replace a cracked front panel or a broken LCD of a BlackBerry Z30

Written By: Hans



INTRODUCTION

This guide will allow you to safely replace the LCD panel of your BlackBerry Z30 unit.



TOOLS:

- [T5 Torx Screwdriver](#) (1)
- [Spudger](#) (1)
- [iFixit Opening Tools](#) (1)



PARTS:

- [BlackBerry Z30 LCD Panel](#) (1)

Step 1 — Battery cover



- Remove the battery cover by grabbing the notch under the bottom speakers and lifting.

Step 2 — Remove SIM and Media Card



- Remove the SIM card and the Media SD card by pushing on them.

Step 3 — Unscrewing the LCD panel




- Locate and unscrew all 10 T5 screws around the back cover

Step 4 — Separate the LCD from the Frame





- Use Plastic opening tools to separate the LCD from the Main body

 Do NOT remove the screen yet, it is attached with a very fragile ribbon to the main board.

 Start on the same side of the Audio Jack

Step 5 — Remove the LCD

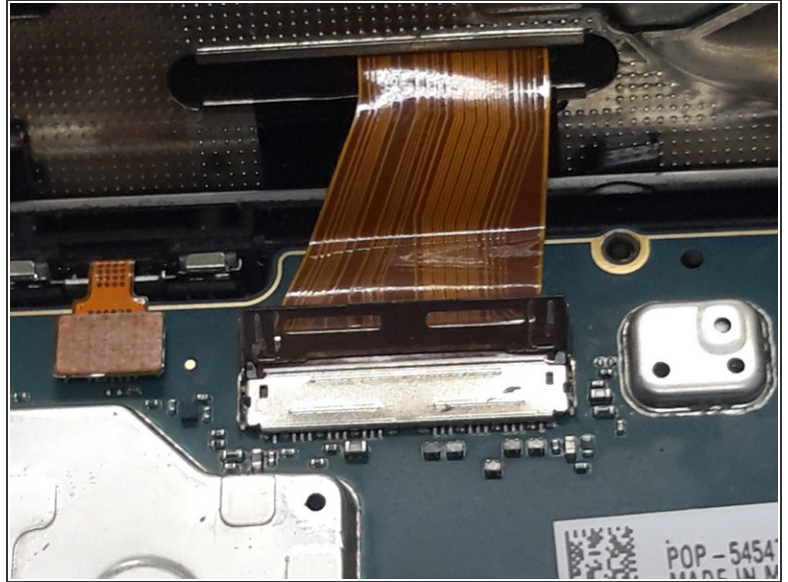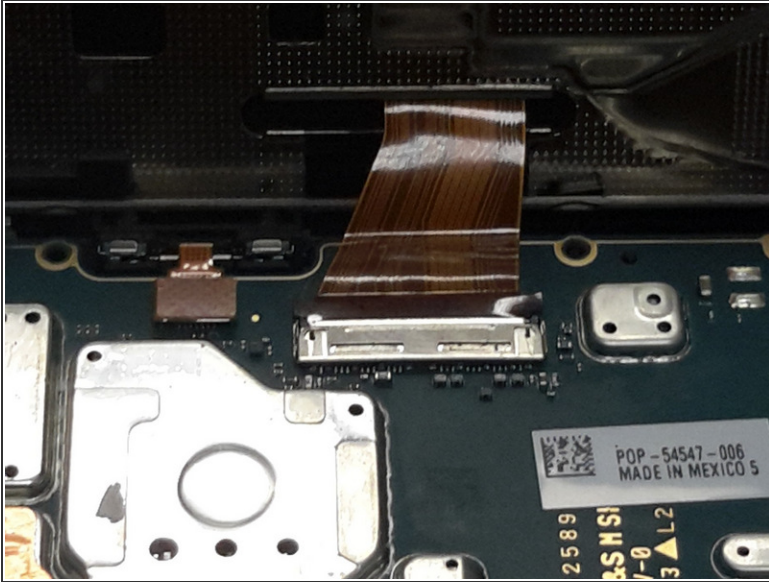

- Use a plastic tool to carefully switch up the LCD ribbon holder
 - Detach the LCD from the main board
- i** When installing the new LCD, make sure the ribbon is inserted to the white line.

Step 6 — LCD Panel removal



- You can now detach the LCD Panel from the main frame.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-18 12:15:32 PM.